


Quickstart Guide

1 Mount and connect display

- Push the display in the slot on the back of the chassis marked in red.
- Connect the cable as shown below.

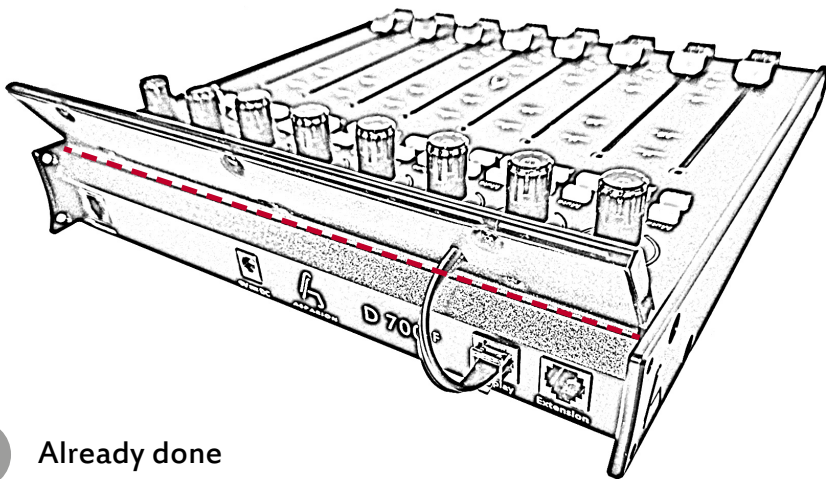

2 Already done

- Enjoy!
- If you have a problem, please do not hesitate to contact us.