



Pyramix

D700

Pyramix

This guide shows you how to set up the D700 in Pyramix. All pictures provided were taken with Pyramix 14 but it is also applicable to most other Pyramix versions.

All files mentioned in this guide can be found on the USB drive, in the Asparion Configurator installation folder or on our website.

If you are having trouble with anything in this guide, please contact us via our website www.asparion.de/contact and we'll immediately help you.

Step 1:

- Select the Pyramix preset

How to select a preset is described in the main manual.

Step 2:


- Extract and copy the .xml files to Pyramix

Windows:

C:\Program Files\Common Files\Merging Technologies\Controllers


Step 3:

- Open Pyramix
- Click on **Settings->All Settings**

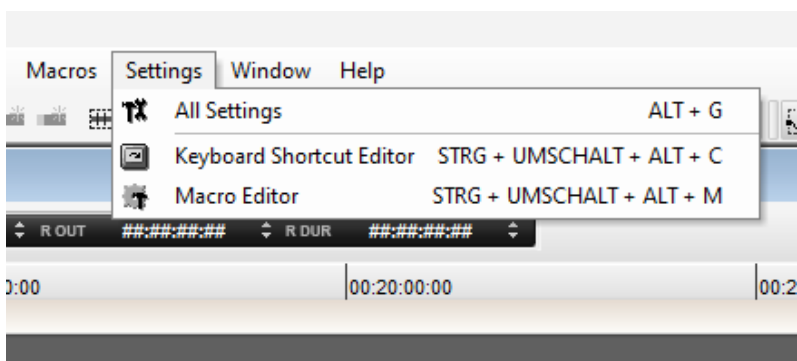



Step 4:

- Go to **Controllers**
- Click **Add**
- Select **OASIS** from the list

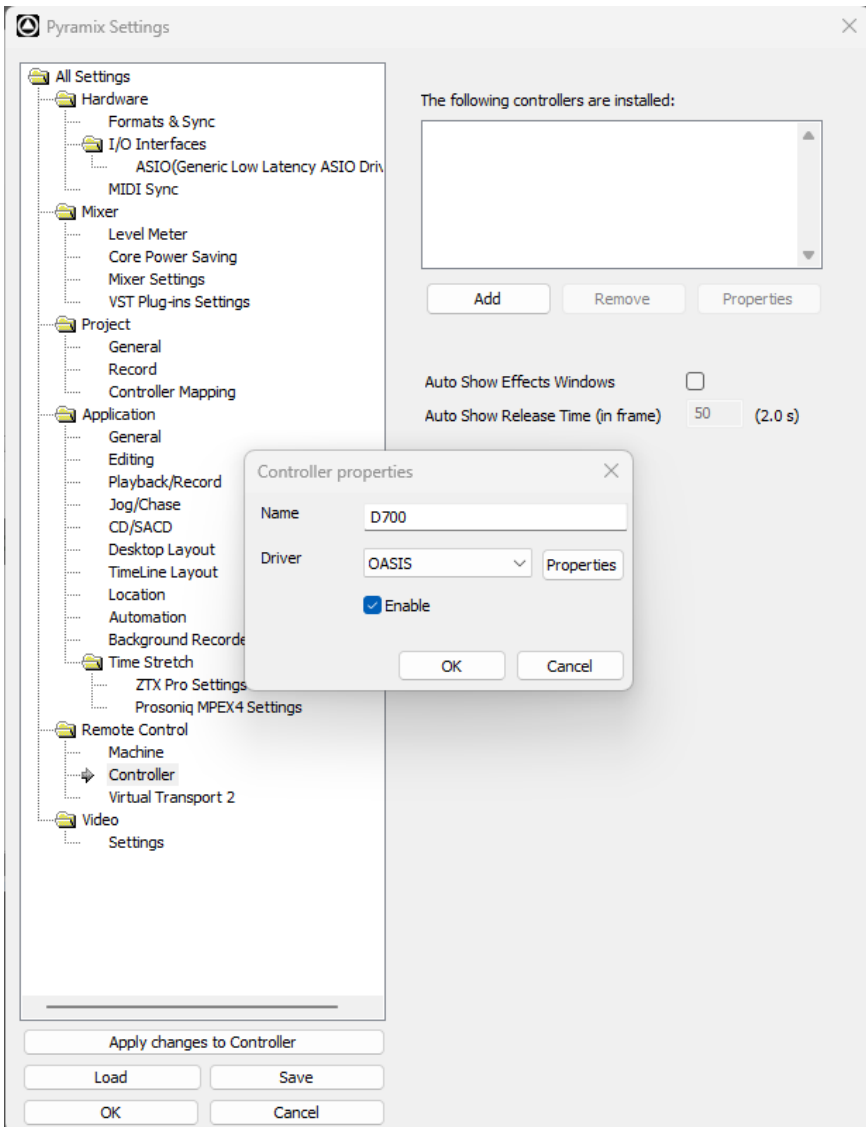

Step 5:


- Go to **Properties**
- Choose **EMC** and click on **Properties**
- Select **D700** as shown below

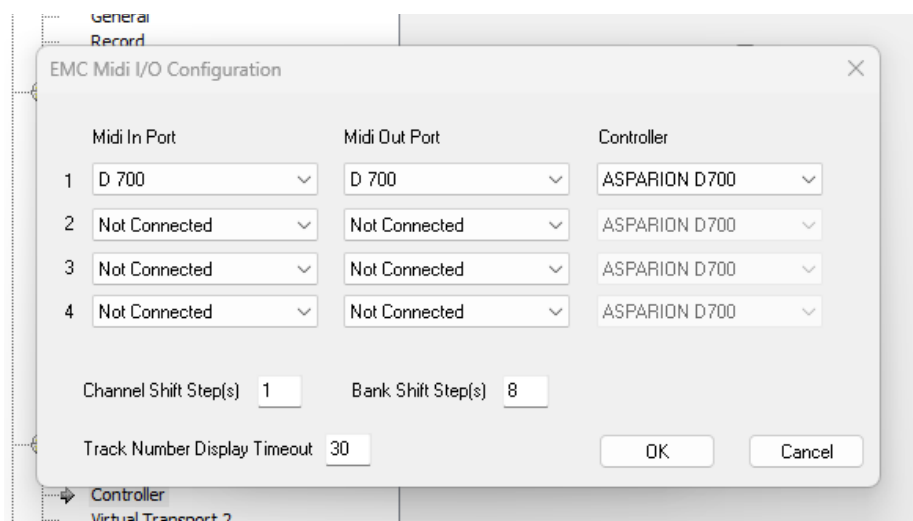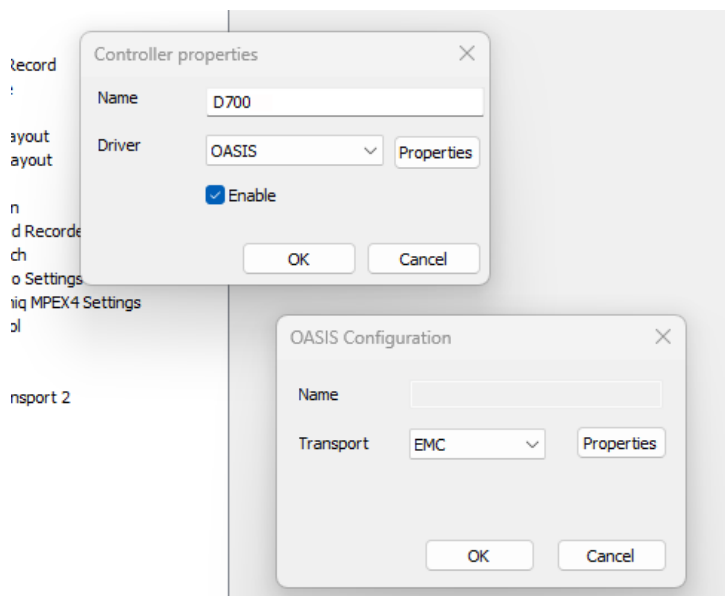

Step 6: (optional)

- If you want to connect more than one extension, select **D700 (2)** as 2 as shown below

If there is only one D700 showing up, you need to enable the extensions first. How you can do that is described in the main manual.

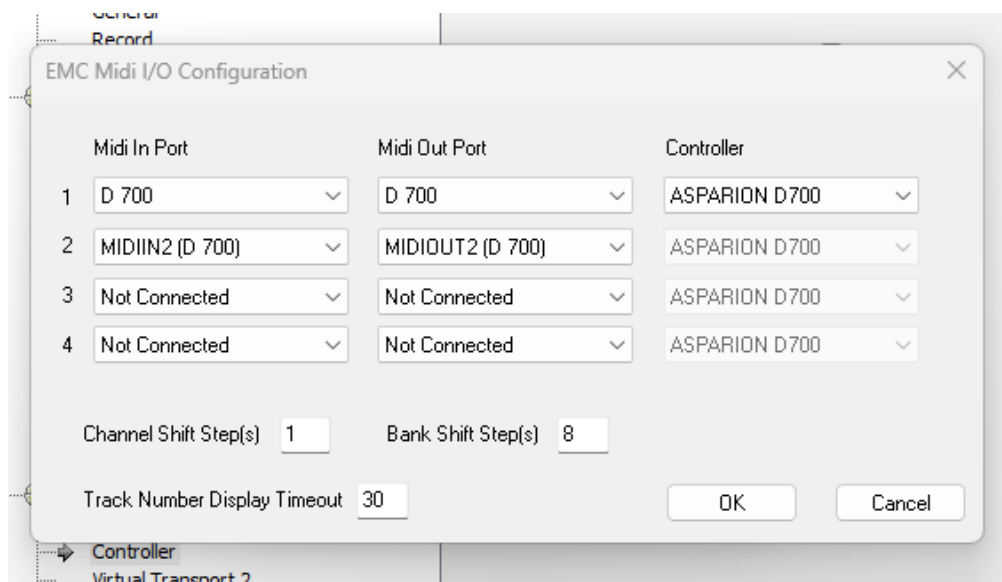

Hints:

- With the knobs **Pan**, **EQ**, **Send**, **FX**, you can assign the respective function to the encoders. Make sure your track actually has an EQ etc. Press **Pan**, **EQ**, **Send**, **FX** again to switch pages. Press **Select** on a channel to switch to channel view



For more information
visit www.asparion.de