



1 Choose number of extensions

- Keep the three buttons **Pan** **EQ** **Send** pressed for about 5 seconds until both the LED rings (1 and 8) start blinking.
- Choose how many extensions you want to connect by rotating the left encoder (first).

Connect and arrange extensions

2

- Connect the power supply as shown below.
- Keep the three buttons marked in red pressed for about 5 seconds until the eight „Select“ buttons start blinking.
- Now you can assign a position number to every extension by clicking the equivalent „Select“ button. The button on the left leads to number one etc. You should make sure that you use every number only once!
- After that you can connect the new extension with the link cable to the previous one.

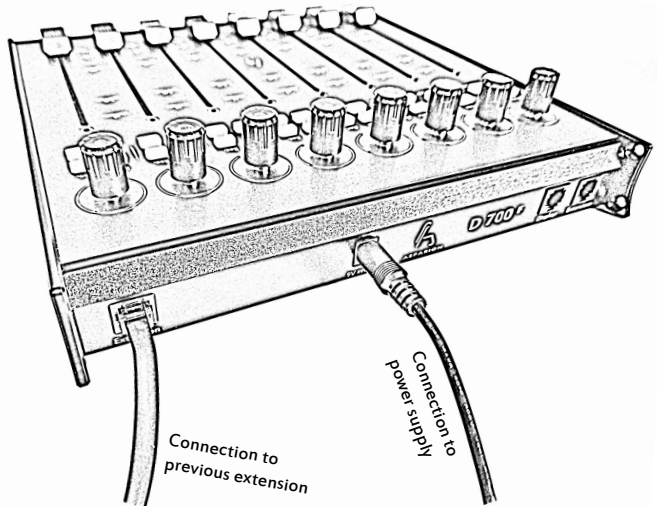

3 Already done

- Enjoy!
- If you have a problem, please do not hesitate to contact us.